

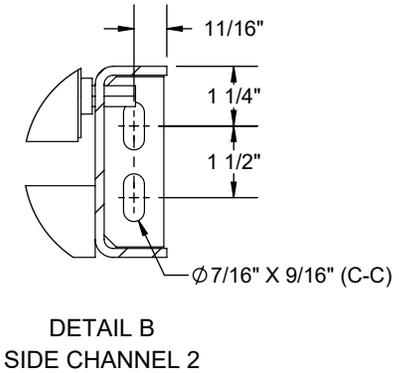
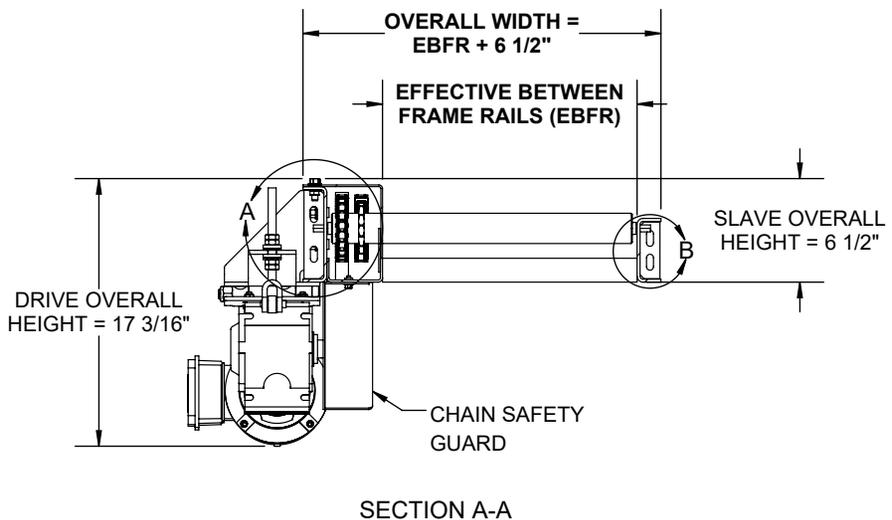
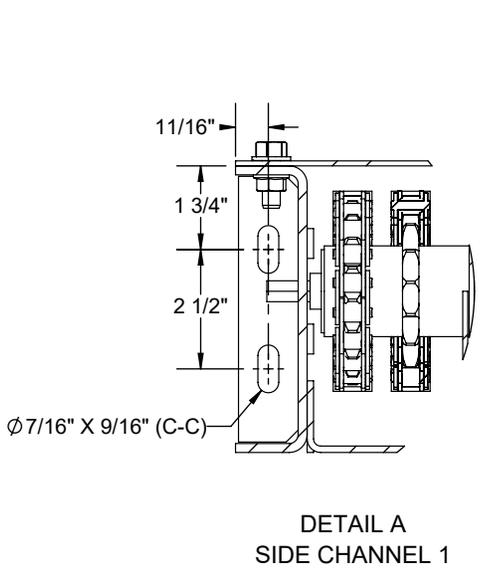


SPECIFICATIONS		
OVERALL LENGTH (DRIVE)	40" TO 120"	
OVERALL LENGTH (SLAVE)	18" TO 120"	
OVERALL WIDTH	9" TO 57"	
ROLLER CENTERS (C-C)	3 1/2", 5"	
EFFECTIVE BETWEEN FRAME RAILS	2 1/2" TO 50 1/2"	
LINE SPEED (FPM)	15, 20, 25, 30, 40, 50, 60	
ROLLERS	1.9" DIA X 0.145 WALL STEEL - 7/16" HEX AXLE	
BEARINGS	SEMI-PRECISION, GREASED	
SIDE CHANNELS	1	6" X 1 1/2" X 3/16"
	2	4" X 1 1/2" X 3/16"

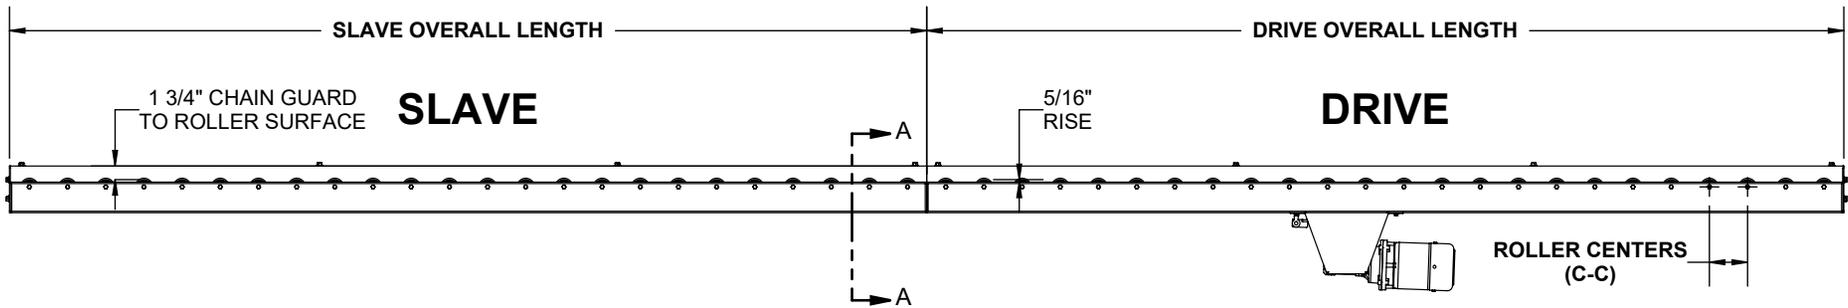


REV	0	Model: CR - 19145HD Chain Driven Live Roller Conveyor
-----	---	--

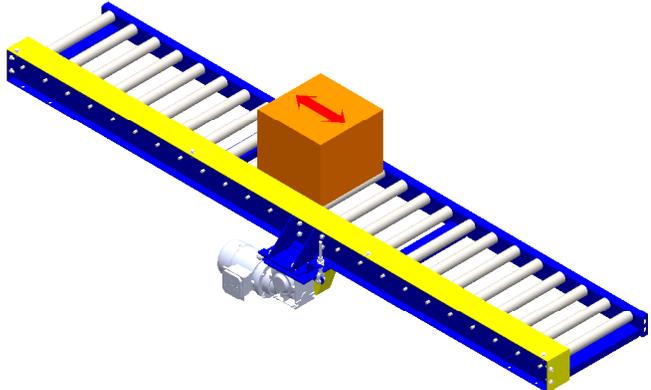

1.0 DRIVE CONVEYOR


FRONT SIDE

BACK SIDE

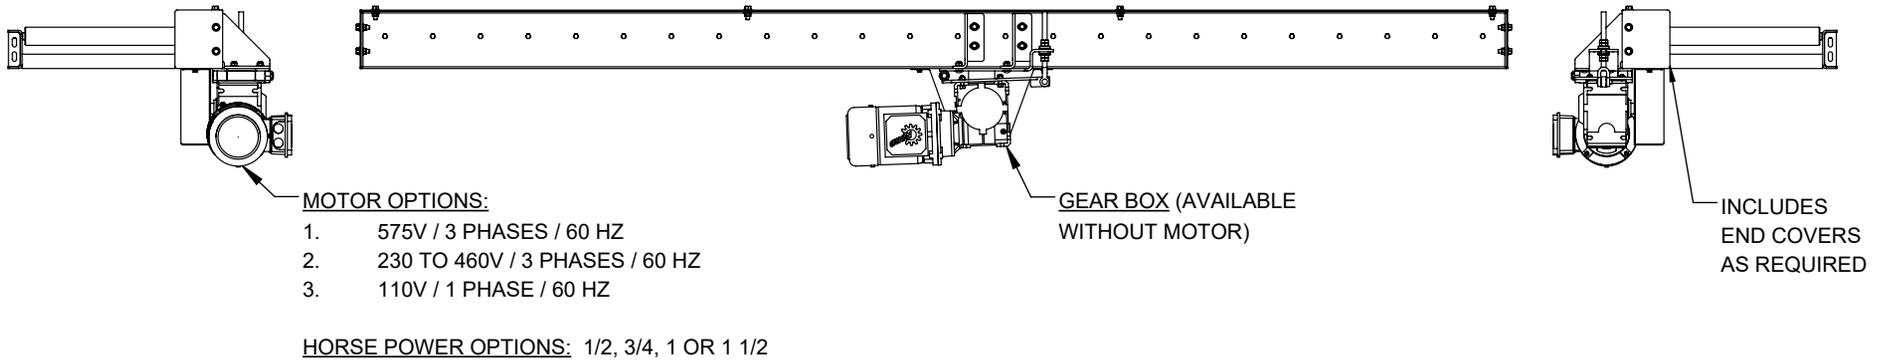

2.0 DRIVE COUPLING

C-C	SPROCKET	CHAIN PITCH
3 1/2"	40A18X1.9	0.5
5"	50A18X1.9	0.625

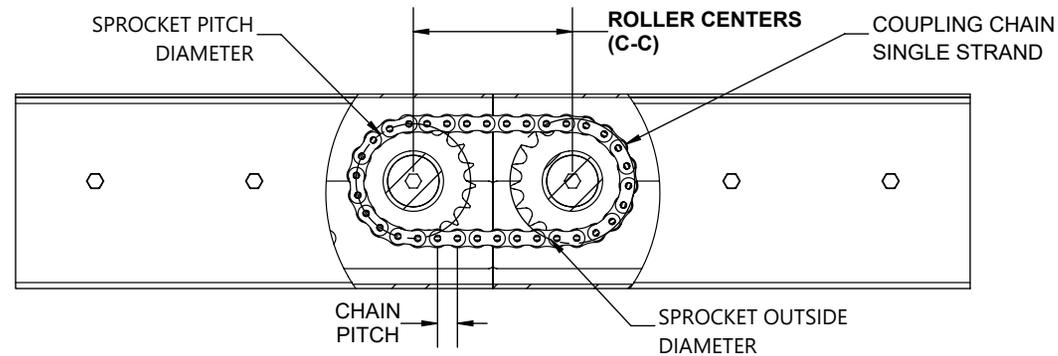

REV


0

Model: CR - 19145HD Chain Driven Live Roller Conveyor Info




3.0 MOTOR ORIENTATION

NOTE:
FRONT & BACK ORIENTATIONS ARE ONLY
AVAILABLE WHEN OVERALL LENGTH IS MORE
THAN 60"

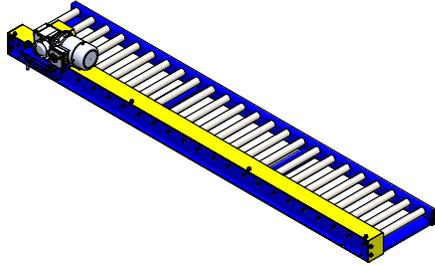


TOP FRONT

FRONT

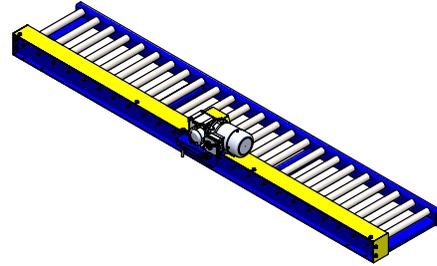


BACK


TOP MIDDLE

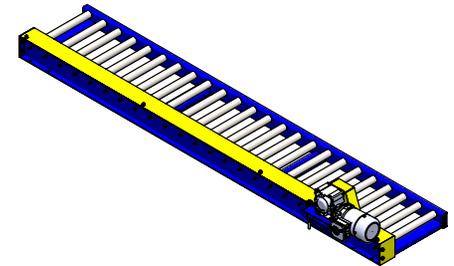


TOP BACK

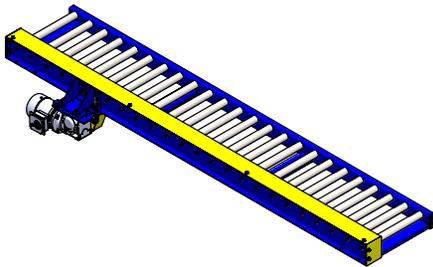

BOTTOM FRONT

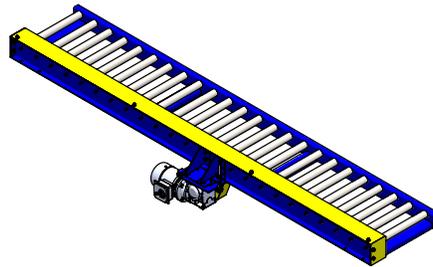

BOTTOM MIDDLE

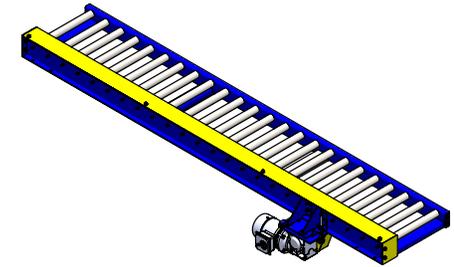

BOTTOM BACK

REV

0

Model: CR - 19145HD Chain Driven Live Roller Conveyor Info

