



SPECIFICATIONS

BETWEEN FRAME RAILS	15", 18", 21", 24", 27", 36"
ROLL CONSTRUCTION	ROUND TUBE, 1.69" TO 2 1/2" DIAMETER, 16 GAUGE
BEARING TYPE	NON-PRECISION, ZINC PLATED STEEL HOUSING, GREASED, 7/16" HEX
AXLE RETENTION	STANDARD - SPRING LOADED ONE SIDE. OPTIONAL: COTTER PIN, FIXED BOLT, LOOSE BOLT OR FIXED AXLE
ROLLER SURFACE	STANDARD GALVANIZED STEEL

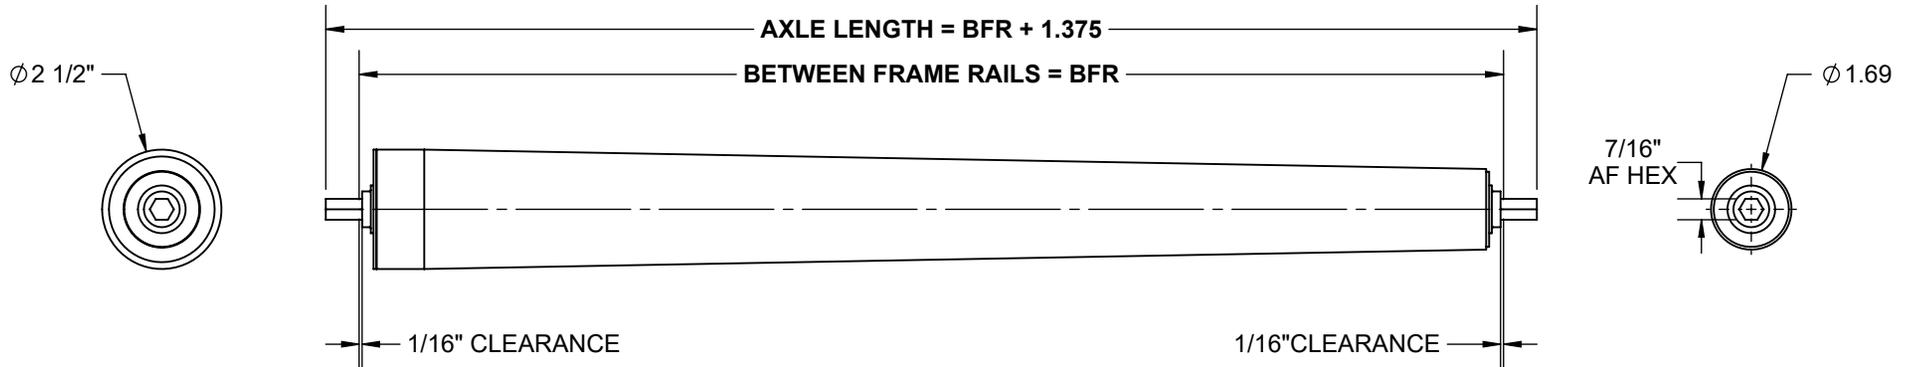

**BEARING 1&2 CROSS SECTION
DETAILED VIEW**

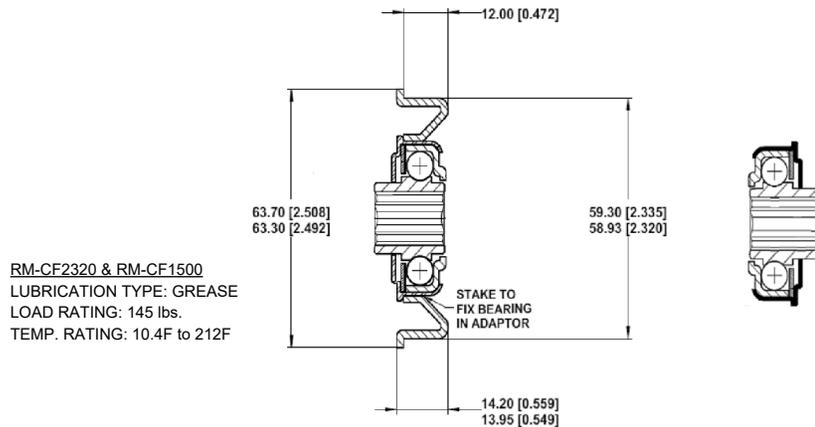

**STANDARD ROLLER
CAPACITY CHART**

BFR [IN]	LOAD CAPACITY [LBS.]
15	280
18	
21	
24	
27	
36	248

REV

0

Model: T16925, 1.69 to 2 1/2" Dia. - 16 Ga. Tapered Roller

