



SPECIFICATIONS

BETWEEN FRAME RAILS	15", 18", 21", 24", 27", 36"
ROLL CONSTRUCTION	ROUND TUBE, 1.69" TO 2 1/2" DIAMETER, 16 GAUGE
BEARING TYPE	PRECISION, PLAIN STEEL HOUSING, GREASED, 7/16" HEX
AXLE RETENTION	STANDARD - SPRING LOADED ONE SIDE. OPTIONAL: COTTER PIN, FIXED BOLT, LOOSE BOLT OR FIXED AXLE
ROLLER SURFACE	STANDARD GALVANIZED STEEL

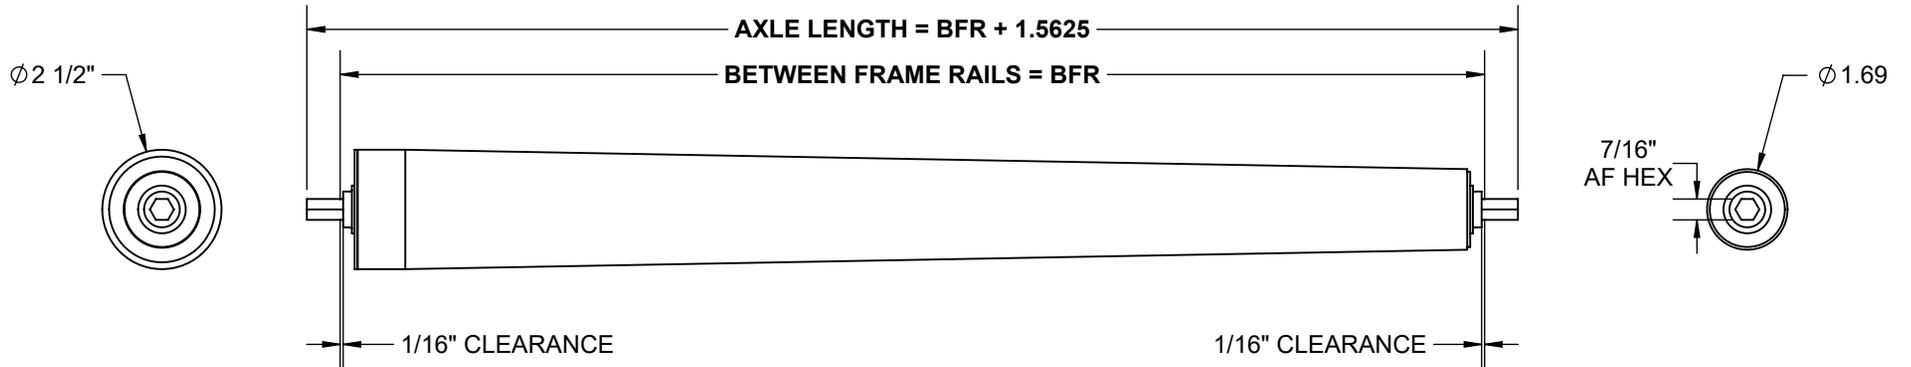

**BEARING 1&2 CROSS SECTION
DETAILED VIEW**

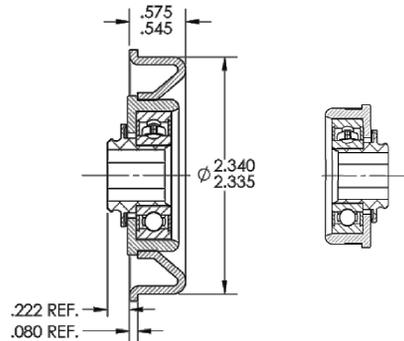

RM-CB14-2C & RM-CB14-2
 LUBRICATION TYPE: GREASE
 LOAD RATING: 450 lbs.
 TEMP. RATING: -4F to 180F
 NOISE LEVEL: QUIET
 STATIC DISCHARGE: YES, INJECTION MOLDED HEX INSERT
 PROTECTION: FRONT - RUBBER SEAL, POLYMER SHIELD
 REAR- RUBBER SEAL

**STANDARD ROLLER
CAPACITY CHART**

BFR [IN]	LOAD CAPACITY [LBS.]
15	155
18	128
21	108
24	94
27	83
36	62

REV

0

Model: T16925P, 1.69" to 2 1/2" Dia. - 16 Ga. Tapered Roller

