

| SPECIFICATIONS | | | | |
|---------------------|--|-----|-----|-----|
| ANGLE (φ) | 90° | 60° | 45° | 30° |
| OVERALL WIDTH | 7" TO 30" | | | |
| INSIDE RADIUS | 36" | | | |
| ROLLER CENTERS | 1 1/2", 2", 3", 4 1/2", 6" | | | |
| BETWEEN FRAME RAILS | 4" TO 27" | | | |
| ROLLERS | 1 3/8" DIA X 18 GA GALVANIZED STEEL - 5/16" HEX AXLE | | | |
| BEARINGS | PRECISION, OILED | | | |
| SIDE CHANNELS | 2 1/2" X 1 1/2" X 12 GA | | | |
| CROSS MEMBERS | 1 1/4" X 1 1/4" X 1/8" | | | |
| FRAME MATERIAL | PLAIN STEEL | | | |
| FINISH | INDUSTRIAL ENAMEL | | | |


NOTE: OPTIONAL SPLIT LANE AVAILABLE TO MAINTAIN TRANSFERRED PACKAGE ORIENTATION.




REGULAR CURVED CONVEYOR



SPLIT LANE CURVED CONVEYOR

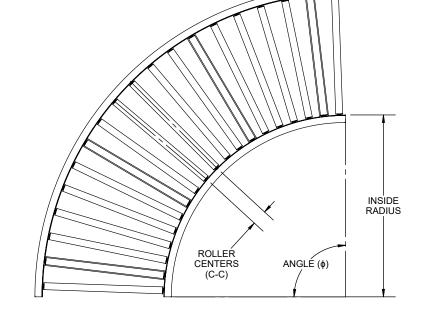





SCALE 1:4

