



SPECIFICATIONS				
ANGLE (ϕ)	90°	60°	45°	30°
OVERALL WIDTH	9" TO 51"			
INSIDE RADIUS	36"			
ROLLER CENTERS	3", 4", 4 1/2", 6", 9", 12"			
BETWEEN FRAME RAILS	6" TO 48"			
ROLLERS	1.9" DIA X 16 GA GALVANIZED STEEL (PVC SLEEVE) - 7/16" HEX AXLE			
BEARINGS	SEMI-PRECISION, OILED			
SIDE CHANNELS	3 1/2" X 1 1/2" X 10 GA			
CROSS MEMBERS	1 1/2" X 1 1/2" X 3/16"			
FRAME MATERIAL	PLAIN STEEL			
FINISH	INDUSTRIAL ENAMEL			




NOTE: OPTIONAL SPLIT LANE AVAILABLE TO MAINTAIN TRANSFERRED PACKAGE ORIENTATION.

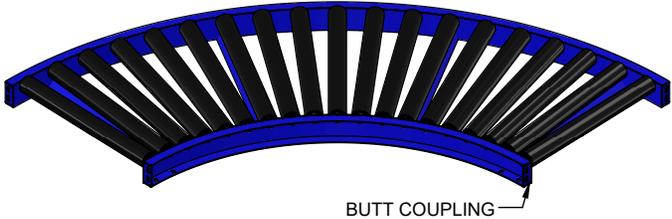

REGULAR CURVED CONVEYOR

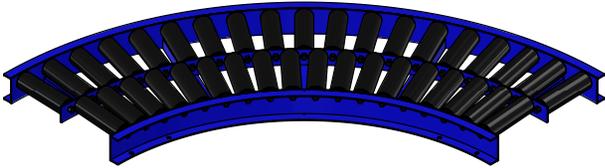

SPLIT LANE CURVED CONVEYOR

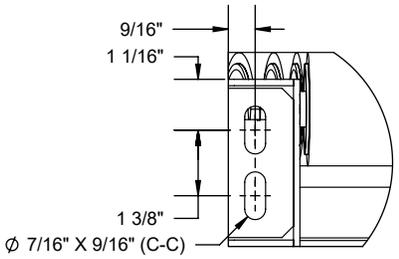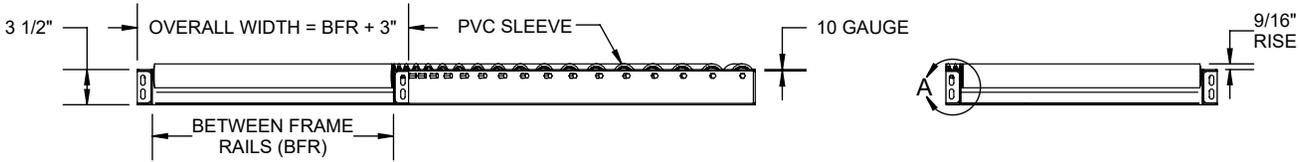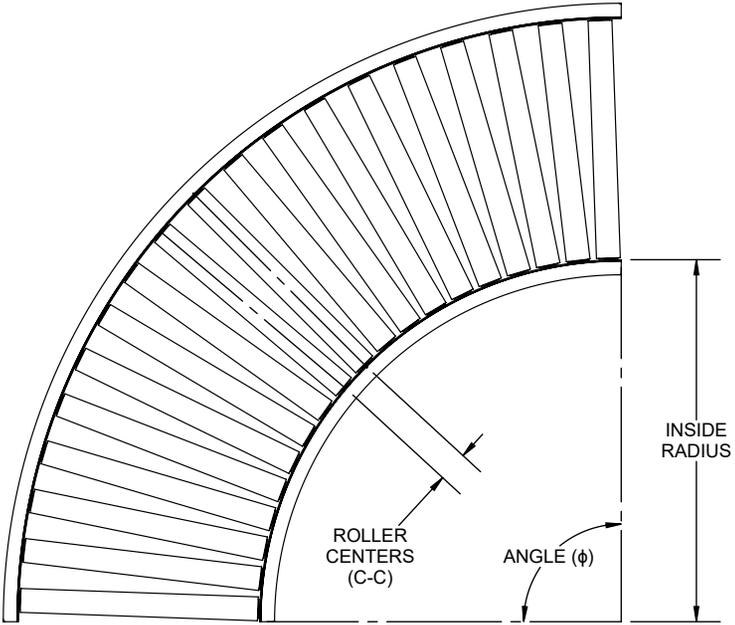

DETAIL A
SCALE 1 : 4

REV	0	Model: GRC – 1916P Gravity Roller Curve Conveyor
-----	---	---

