


SPECIFICATIONS				
ANGLE (φ)	90°	60°	45°	30°
OVERALL WIDTH	9" TO 51"			
INSIDE RADIUS	36"			
ROLLER CENTERS	3", 4", 4 1/2", 6", 9", 12"			
BETWEEN FRAME RAILS	6" TO 48"			
ROLLERS	2" DIA X 13 GA STEEL - 7/16" HEX AXLE			
BEARINGS	SEMI-PRECISION, OILED			
SIDE CHANNELS	3 1/2" X 1 1/2" X 10 GA			
CROSS MEMBERS	1 1/2" X 1 1/2" X 3/16"			
FRAME MATERIAL	PLAIN STEEL			
FINISH	INDUSTRIAL ENAMEL			


NOTE: OPTIONAL SPLIT LANE AVAILABLE TO MAINTAIN TRANSFERRED PACKAGE ORIENTATION.

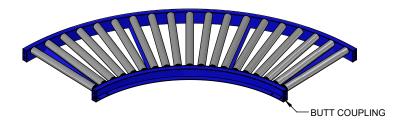


REGULAR CURVED CONVEYOR

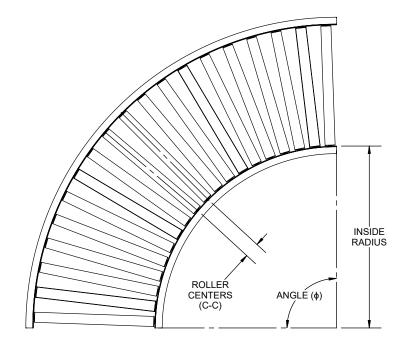





SPLIT LANE CURVED CONVEYOR



DETAIL A SCALE 1:4



