

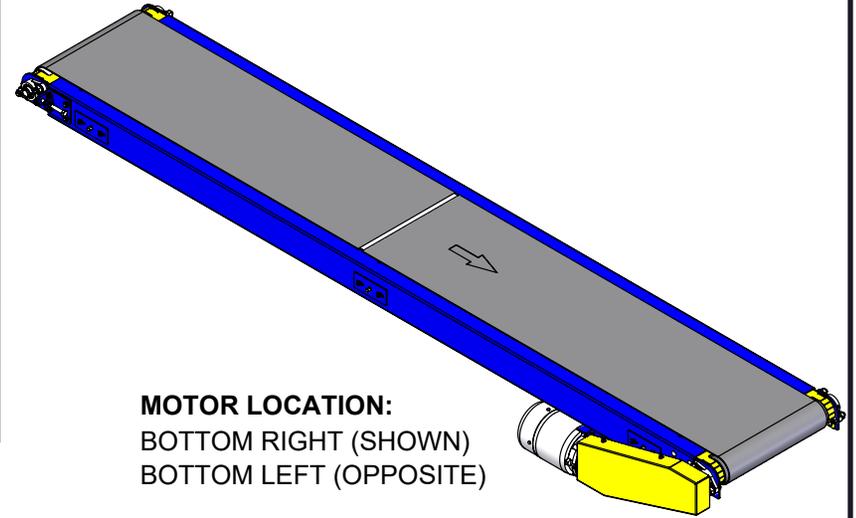


| SPECIFICATIONS        |   |                  |              |
|-----------------------|---|------------------|--------------|
| CONVEYOR TYPES        | SINGLE  | DOUBLE           | MULTI        |
| OVERALL LENGTH        | 48" TO 129"   | 130" TO 248 1/2" | 249" TO 600" |
| OVERALL HEIGHT        | 14 5/16"  |                  |              |
| BELT WIDTH            | 6" TO 36"   |                  |              |
| PAN WIDTH             | 10 1/2" TO 40 1/2"  |                  |              |
| DRIVE PULLEY          | 4" OD WITH 1/4" THICK SBR LAGGING WITH 1" DIA. CARBON STEEL SHAFT - STANDARD TRAPEZOIDAL CROWN                  |                  |              |
| TAIL PULLEY           | 4" OD - 11 GA ERW PIPE WITH 1" DIA. CARBON STEEL SHAFT - STANDARD TRAPEZOIDAL CROWN                             |                  |              |
| SNUB & RETURN ROLLERS | 1.9" DIA. X 16 GA GALVANIZED STEEL  |                  |              |
| CAPACITY              | UP TO 620LBS, VARIES WITH HP, SPEED, AND BELT WIDTH. CONTACT US TO REVIEW YOUR APPLICATION TO CONFIRM CAPACITY. |                  |              |

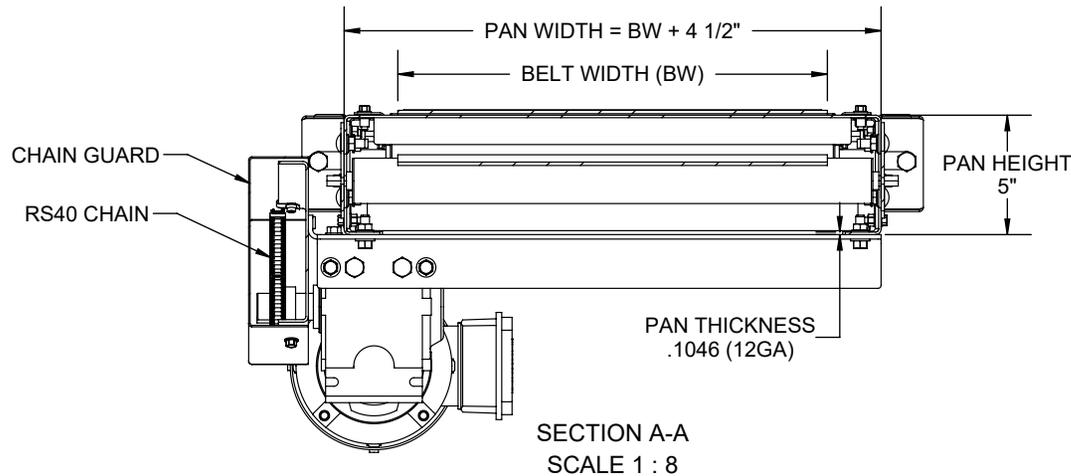

**MOTOR LOCATION:**  
 BOTTOM RIGHT (SHOWN)  
 BOTTOM LEFT (OPPOSITE)

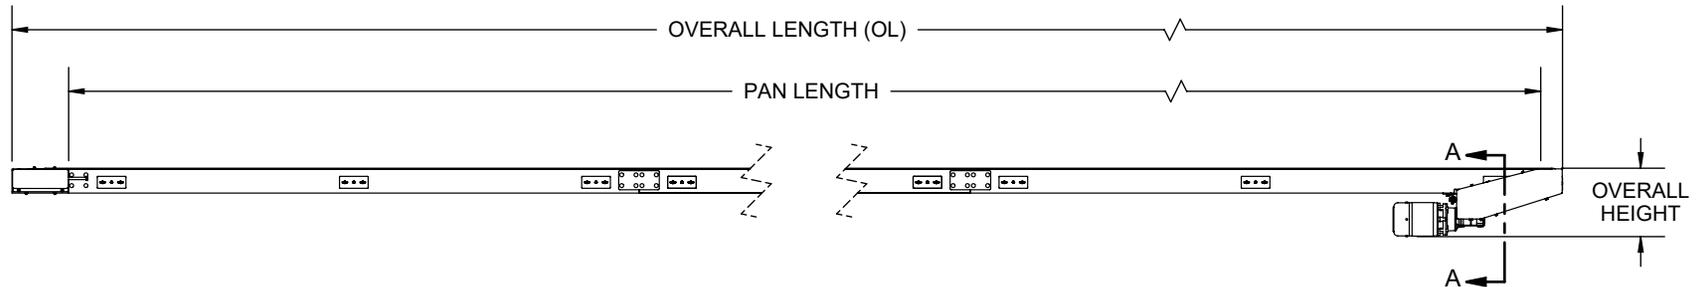


REV

0


**Model: MDSB – Medium Duty Slider Bed Belt Conveyor**



TRANSITIONAL BELT /  
ROLLER TAKE UP  
UNIT (FOR MULTI ONLY)

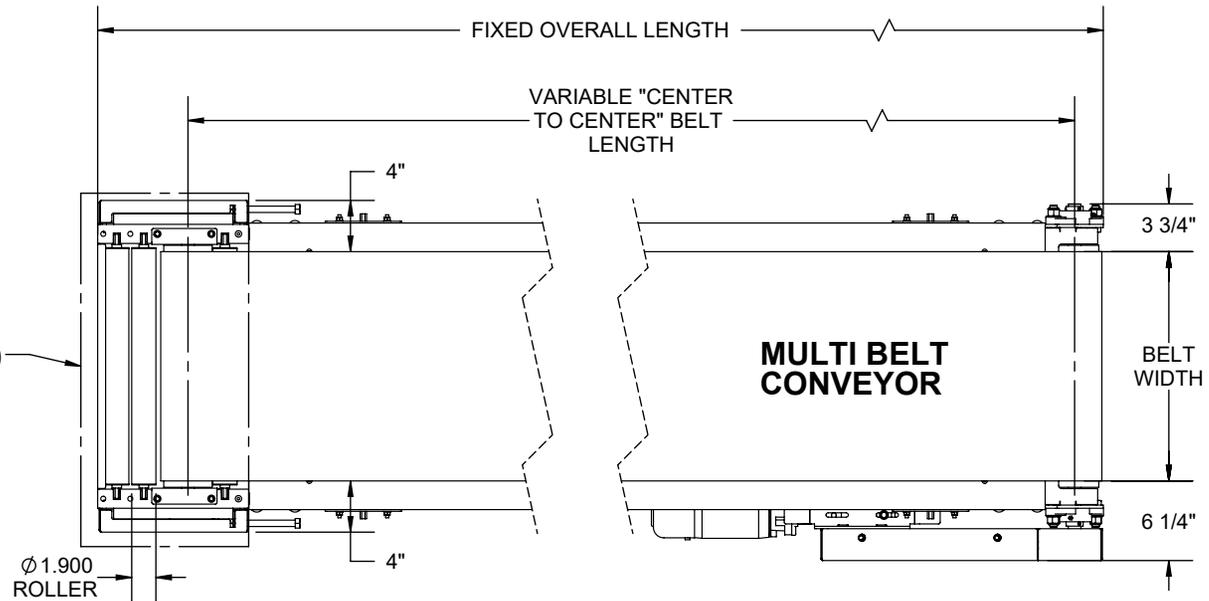

STANDARD TAKE UP UNIT  
(FOR SINGLE & DOUBLE)


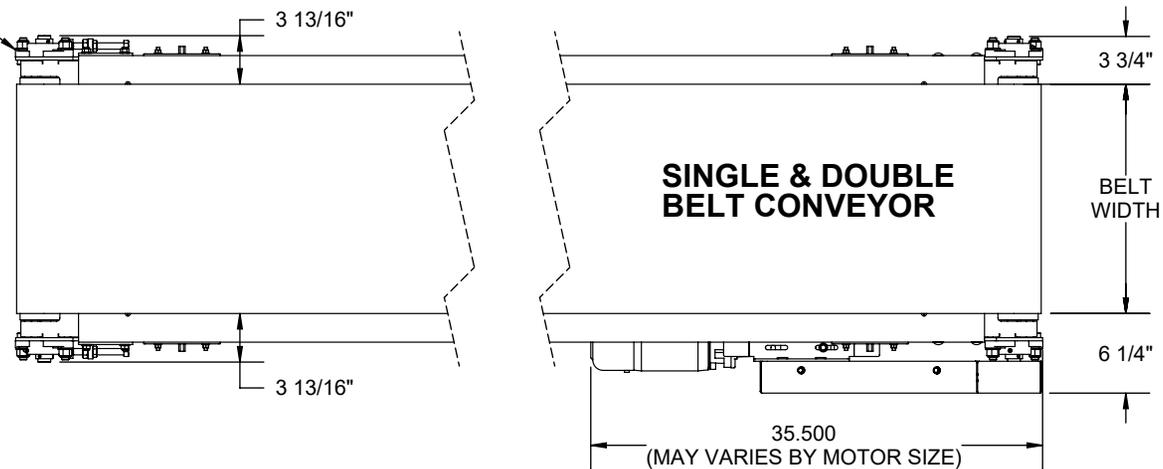


REV

0


**Model: MDSB – Medium Duty Slider Bed Belt Conveyor**



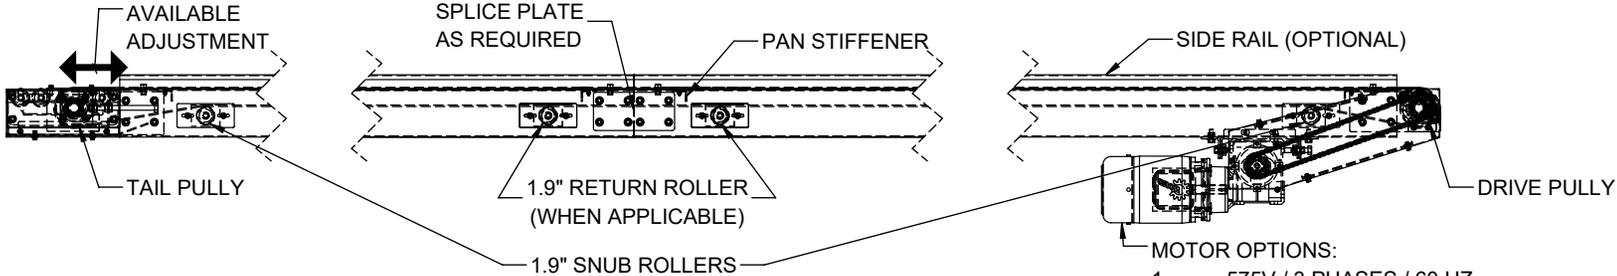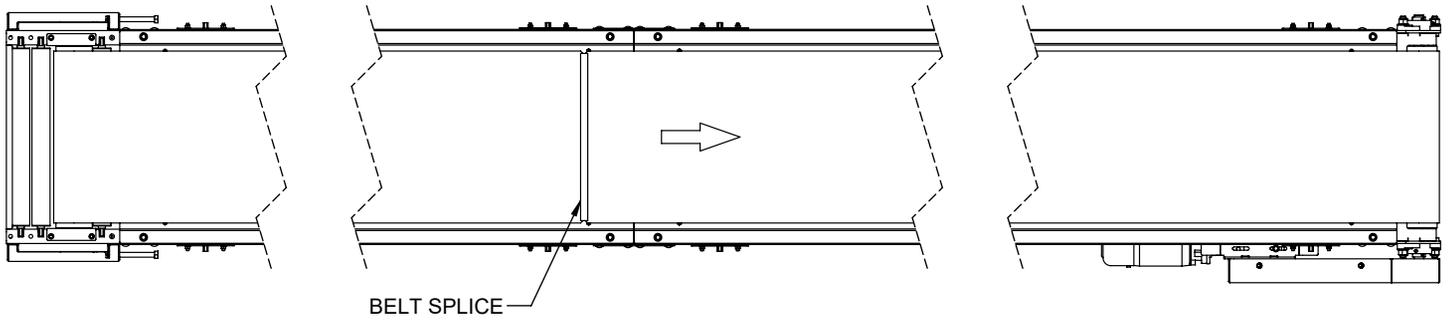

- MOTOR OPTIONS:
1. 575V / 3 PHASES / 60 HZ
  2. 230 TO 460V / 3 PHASES / 60 HZ
  3. 110V / 1 PHASE / 60 HZ

HORSE POWER OPTIONS: 1/2, 3/4, 1 OR 1 1/2

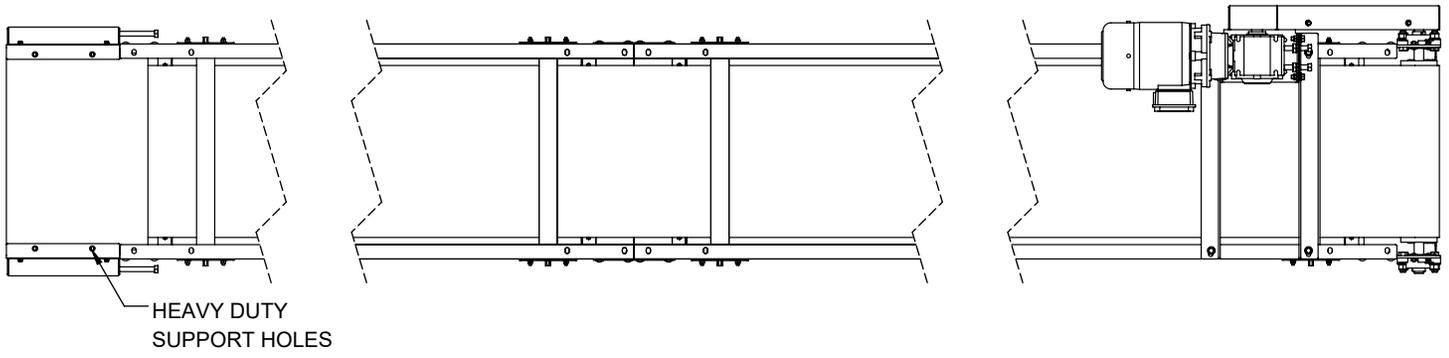

REV 0

**Model: MDSB – Medium Duty Slider Bed Belt Conveyor**

